



Teknisk specifikation

	KINGSTON 38 MM
Type	Tufted synthetic grass carpet
Material	PE Monofilament straight & PP Monofilament curled (UV Stabilized)
Yarn quality	Environmental friendly, free of lead and cadmium
Primary backing	100 % PP black fleece, UV Stabilized, Weight 95 g/m ²
Secondary backing	Black Latex compound with a base of styrenebutadiene (SBR), with drainage holes, Weight 684 g/m ²
Waterpermeability	60 liter/min/m ²
Pile height	38 mm
Face weight	1 338 g/m ² (+/- 10%)
Total weight	2 117 g/m ² (+/- 10 %)
Turf gauge	3/8 gauge
Stitches per 10 cm linear	26 (+/- 1%)
Stitches per m ²	27 300 (+/- 10%)
Colour	Mix of light and dark green + Field-jute thatch
UV Stability	Meets DIN 53387 Standard (6000 hours)
Colour fastness	Xenon Test: Blue Scale > 7, Grey Scale > 4
Colour lining	Not applicable
Roll width	200 cm, 400 cm
Roll length	20-25 m

REACH-deklaration

Leverantören har kontrollerat att produkten inte innehåller särskilt farliga ämnen (dvs. från SVHC-listan).

Senaste REACH-certifikat: 2022-12-28



Installation


	KINGSTON 38 MM
Applications	Gardens, Landscaping, Terraces
Infill advice	Silica sand, gradation 0,5 - 1,0 mm, 80 % roundshaped, appr. 6-8 kg/m ²
Comments	Before installation make sure the rolls are from the same production code (first five digits of the roll number) Project.



Rulla ut första rullen konstgräs och placera den rätt. Rulla sedan ut den andra rullen och placera den tätt intill den första. Avståndet får inte vara mer än 4 mm.



Vik upp kanterna på konstgräset, ca 30-40 cm av varje rulle, och placera ut tejpet mellan dem. Dra sedan sakta av baksidan av tejpet.

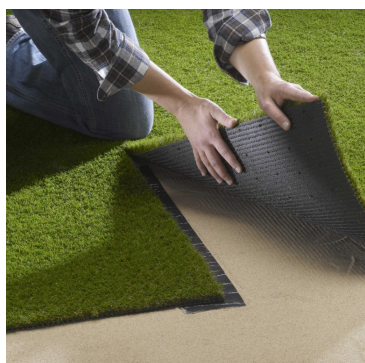

Vik sakta tillbaka konstgräset efterhand som du drar av baksidan av tejpet, och tryck ihop bitarna så tätt som möjligt.



Pressa gräset mot tejpet så att det fastnar ordentligt.

För stabilitet fyll och borsta ut med sand.

VULKTEJP

Polytuft erbjuder tillhörande vulktejp som är optimalt för installation av konstgräs.

12,5 cm x 5 m

