



Teknisk specifikation

	PALMA 22 MM
Type	Tufted synthetic grass carpet
Material	PE Monofilament straight & PP Monofilament curled (UV Stabilized)
Yarn quality	Environmental friendly, free of lead and cadmium
Primary backing	100 % PP with fiber locked fleece, black, UV Stabilized, Weight 135 g/m ²
Secondary backing	Black Latex compound with a base of styrenebutadiene (SBR), with drainage holes, Weight 760 g/m ²
Waterpermeability	60 liter/min/m ²
Pile height	22 mm
Face weight	925 g/m ² (+/- 10%)
Total weight	1 820 g/m ² (+/- 10 %)
Turf gauge	3/8 gauge
Stitches per 10 cm linear	16 (+/- 1 %)
Stitches per m ²	16 800 (+/- 10 %)
Colour	Mix of light and dark green + brown
UV Stability	Meets DIN 53387 Standard (6000 hours)
Colour fastness	Xenon Test: Blue Scale > 7, Grey Scale > 4
Colour lining	Not applicable
Roll width	200 cm, 400 cm
Roll length	20-25 m

REACH-deklaration

Leverantören har kontrollerat att produkten inte innehåller särskilt farliga ämnen (dvs. från SVHC-listan).

Senaste REACH-certifikat: 2022-12-28



Installation


	PALMA 22 MM
Applications	Gardens, Landscaping, Terraces
Comments	Before installation make sure the rolls are from the same production code (first five digits of the roll number) Project.




Rulla ut första rullen konstgräs och placera den rätt. Rulla sedan ut den andra rullen och placera den tätt intill den första. Avståndet får inte vara mer än 4 mm.



Vik upp kanterna på konstgräset, ca 30-40 cm av varje rulle, och placera ut tejp mellan dem. Dra sedan sakta av baksidan av tejp.

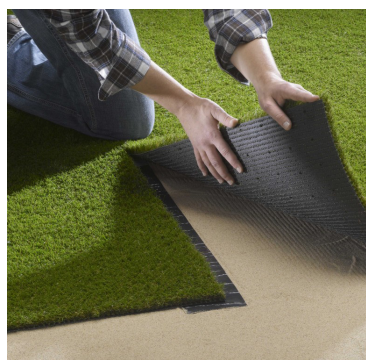

Vik sakta tillbaka konstgräset efterhand som du drar av baksidan av tejp, och tryck ihop bitarna så tätt som möjligt.

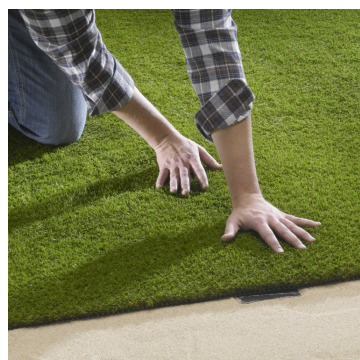

Pressa gräset mot tejp så att det fastnar ordentligt.

För stabilitet fyll och borsta ut med sand.

VULKTEJP

Polytuft erbjuder tillhörande vulktejp som är optimalt för installation av konstgräs.

12,5 cm x 5 m

